




**SLK-R680-4G**

**Industrial 4G CPE With Wifi6  
Data Sheet**

Version: V1.0

Date: 22/2/2022

## Product Introduction

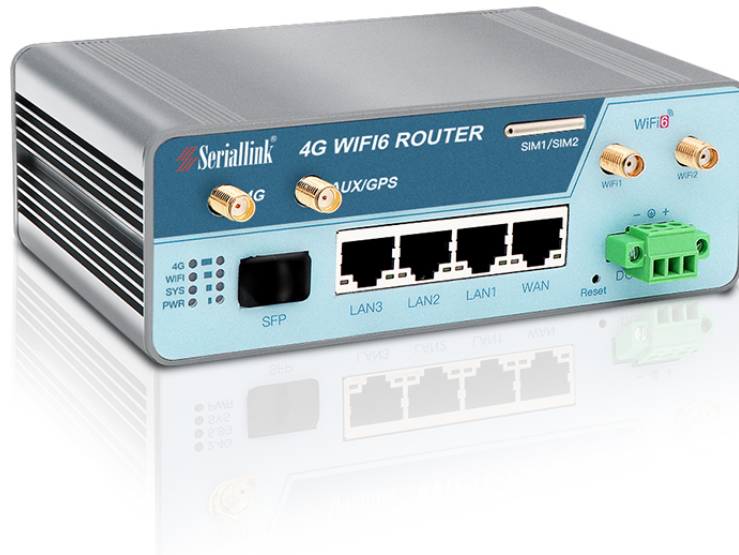

### Introduction:

SLK-R680 is a multi-functional wireless 4G CPE product with high-performance 4-core CPU, high power WiFi6, and integration of cellular 4G network. Supports 4x 1000M Ethernet ports, which can be configured as LAN/WAN ports, you can choose DC48V POE power out version, 2X2 MIMO 2.4g /5.8G WiFi6, etc. It also adopts wide temperature, wide voltage input and EMC test with electromagnetic compatibility.

Has been widely used in the Internet of things industry chain of M2M industry, such as self-service terminals, smart grid, smart transportation, smart home, financial, mobile POS terminals, supply chain automation, industrial automation, intelligent buildings, fire control, public security, environmental protection, meteorology, digital medical treatment, telemetry, agriculture, forestry, water, coal, petrochemical and other fields.

### Features:

- ✓ Qualcomm Quad-core CPU/ 1.2GHz, 8Gb DDR3, 4GB eMMC
- ✓ 802.11ac mode: PHY rate: 866.7 Mbps (5 GHz) and 400 Mbps (2.4 GHz)  
or proprietary PHY rate: 1083 Mbps (5 GHz) and 500 Mbps (2.4 GHz)
- ✓ 802.11ax mode: PHY rate: 1201 Mbps (5 GHz) and 573.5 Mbps (2.4 GHz)
- ✓ Wi-Fi supports supported IEEE802.11ac, IEEE802.11ax
- ✓ 4 x 10/100/1000M Ethernet LAN /WAN Ports (RJ45 Connector)
- ✓ 1x 1000M SFP Optical Fiber Interface
- ✓ 2x NANO SIM card
- ✓ 48V POE output (optional)
- ✓ DIN35MM Rail Install

**Details:**
**Hardware :**

<b>Hardware</b>	
<b>CPU</b>	Qualcomm Quad-core CPU/ 1.2GHZ
<b>RAM</b>	8Gb
<b>eMMC</b>	4GB
<b>OS</b>	LINUX /OpenWRT

**Cellular Interface:**

<b>Cellular Interface</b>		
<b>SLK-R680-4G</b>	4G/3G	<ul style="list-style-type: none"> <li>•LTE-FDD B1/B3/B5 /B8</li> <li>•UMTS/HSPA+ B1/B8</li> </ul>
<b>SLK-R680-4G(EU)</b>	4G/3G/2G	<ul style="list-style-type: none"> <li>•LTE-TDD B38/B40/B41</li> <li>•LTE-FDD B1/B3/B5/B7/B8/B20</li> <li>•UMTS/HSPA+ B1/B5/B8</li> <li>•GSM/GPRS/EDGE B3/B8</li> </ul>
<b>SLK-R680-4G(AU)</b>	4G/3G/2G	<ul style="list-style-type: none"> <li>•LTE-TDD B40</li> <li>•LTE-FDD B1/B2/B3/B4/B5/B7/B8/B28</li> <li>•UMTS/HSPA+ B1/B2/B5/B8</li> <li>•GSM/GPRS/EDGE 850/900/1800/1900MHz</li> </ul>
<b>SLK-R680-4G(AF)</b>	4G/3G	<ul style="list-style-type: none"> <li>LTE Bands: B2/B4/B5/B12/B13/B14/B66/B71</li> <li>•WCDMA Bands: B2/ B4/ B5</li> </ul>
<b>Bandwidth</b>	<ul style="list-style-type: none"> <li>• LTE CAT4-DL: 50Mbps, UL: 150Mbps</li> <li>• TD-HSDPA/HSUPA-DL: 2.2 Mbps, UL: 2.8 Mbps</li> <li>• HSPA+-DL: 5.76 Mbps, UL: 42 Mbps</li> <li>• WCDMA – DL/UL: 384Kbps</li> </ul>	

**WIFI Performance:**

<b>WIFI supported</b>	
<b>Wireless</b>	High power WiFi performance On-board 2x2 2.4GHz 802.11b/g/n, max 21dBm per chain @-35dB DEVM On-board 2x2 5GHz 802.11a/n/ac/ax/max 20dBm per chain @-40dB DEVM
<b>Frequency</b>	2.412GHz to 2.472GHz and 5.150GHz to 5.825GHz, simultaneous dual band
<b>WIFI Rate</b>	2x2 MU-MIMO On-board WiFi 2.4GHz radio, up to 574Mbps physical data rate, TCP data up to 400Mbps
	2x2 MU-MIMO On-board WiFi 5GHz radio, up to 1201Mbps physical data rate, TCP data rate up to 800Mbps
<b>Modulation Techniques</b>	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g: OFDM (BPSK / QPSK / 16-QAM / 64-QAM) 802.11ac/n: OFDM (BPSK / QPSK / 16-QAM / 64-QAM / 256-QAM) 802.11ax: OFDM 1024QAM

**Router characteristics:**

Router characteristics	
Firewall	Network Address Translation (NAT)
	State full Packet Inspection (SPI)
Media Access Control	CSMA/CA with ACK
WiFi	AP, Client
VPN protocol	PPTP,L2TP ,OpenVPN Client, SERIALLINK VPN Client
DHCP	Build-in DHCP (Dynamic Host Configuration Protocol)
Others protocol	Supported PPP,PPOE, DDNS,ICMP,VRRP etc

**Interface:**

Interface	
LAN/WAN Ports	4 x 10/100/1000M LAN/WAN ports(RJ45 Connector)
Optical Fiber Interface	1x 1000M SFP Interface
Reset	1x Reset
Antennas	2x 2.4G&5.8G WIFI Antennas (50Ω SMA interface ) 1x4G Main Antenna(50Ω SMA interface) 1x4G AUX or GPS Antenna(50Ω SMA interface)
LED	Power-SYS-4G- WiFi-Signal strength - LEDs
SIM Card Slot	Dual-SIM card slot
POE Ethernet	Supported 48V POE output(optional)

**Power interface :**

Power	
Default power	DC 12V/2A power adapter (US,EU etc stander option)
Input VDC	12~55VDC
Power Consumption	24W (Max)

**Physical property:**

Physical property:	
Operating Temperature	Storage Temperature: (-40°C to 85°C)
	Operating Temperature: (-40°C to 75°C)
Relative Humidity	95%
Size	L*S*H: 144mm x94mm x 50mm
Weight	Net weight:556g
	Packing weight: 987kg
Certification	CCC,CE,FCC,RHOS


**Others:**

<b>Warranty</b>	2 years
-----------------	---------

**Order information:**

<b>Model</b>	SLK-R680-4G CPE ,2xWIFI antennas,1x 12V/2A Power adapter, 1x RJ45 Cable,2x4G Antenna
<b>SLK-R680-4G POE(optional)</b>	SLK-R680-4G CPE ,2xWIFI antennas,1x 12V/2A Power adapter, 1x RJ45 Cable,2x4G Antenna
<b>SLK-R680-4G(CE) POE(optional)</b>	SLK-R680-4G(CE) CPE ,2xWIFI antennas,1x 12V/2A Power adapter, 1x RJ45 Cable,2x4G Antenna
<b>SLK-R680-4G(AU) POE(optional)</b>	SLK-R680-4G(AU)CPE ,2xWIFI antennas,1x 12V/2A Power adapter, 1x RJ45 Cable,2x4G Antenna
<b>SLK-R680-4G(AF) POE(optional)</b>	SLK-R680-4G(AF) CPE ,2xWIFI antennas,1x 12V/2A Power adapter, 1x RJ45 Cable,2x4G Antenna

**Product size drawing**  
Unit: mm

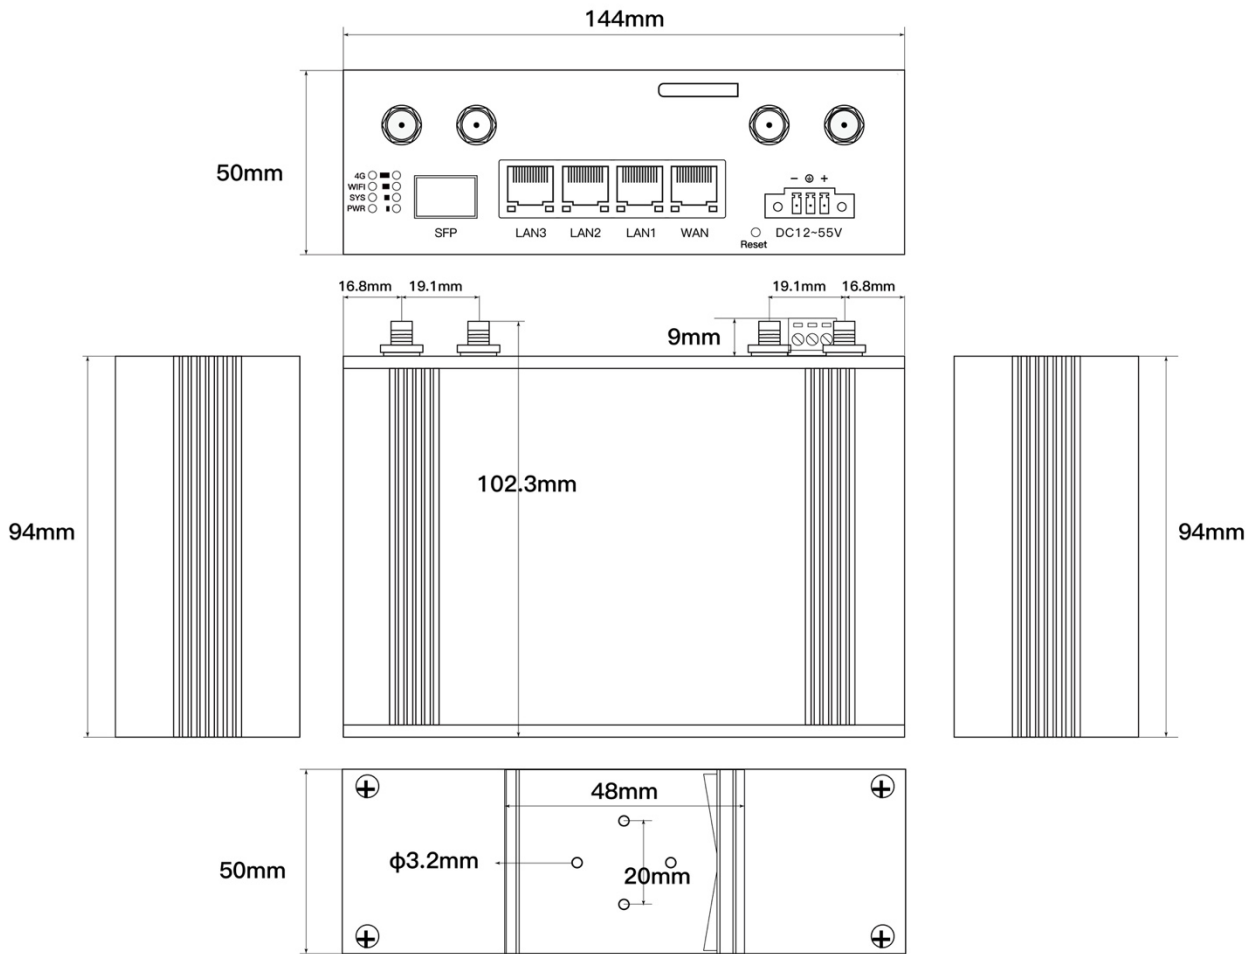

Thank you for your support of SERIALLINK products.

If you have any questions, please email: [info@seriallink.net](mailto:info@seriallink.net) or [www.seriallink.net](http://www.seriallink.net)